


## Wire Rope Dyform Bristar 6

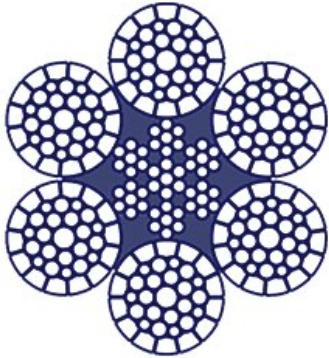

### Product information

zZ G

Dyform Bristar 6 is a high performance compacted single layer constructed rope which incorporates an engineered extruded plastic profile between the 6 outer strands and the rope core for various cranes and industrial applications.

- Outstanding bending fatigue performance
- Improved support of outer strands in service

**Rope construction:** Dyform Bristar 6x47 IWRC

**Temperature range:** -20°C up to 65°C

Part Code	Rope Diameter, mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay.	Min. Breaking force, kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103105086250719	50.8	1,770	Galvanized	zZ	1,941.72	2,022.4	SupplierStandard	1,196
103106356250719	63.5	1,770	Galvanized	zZ	3,108.77	-	SupplierStandard	1,802
103106706270719	67	1,960	Galvanized	zZ	3,530.39	2,310	SupplierStandard	2,000
103107306240719	73	1,670	Galvanized	zZ	4,035.42	-	SupplierStandard	2,399